Kenwood KAC-920

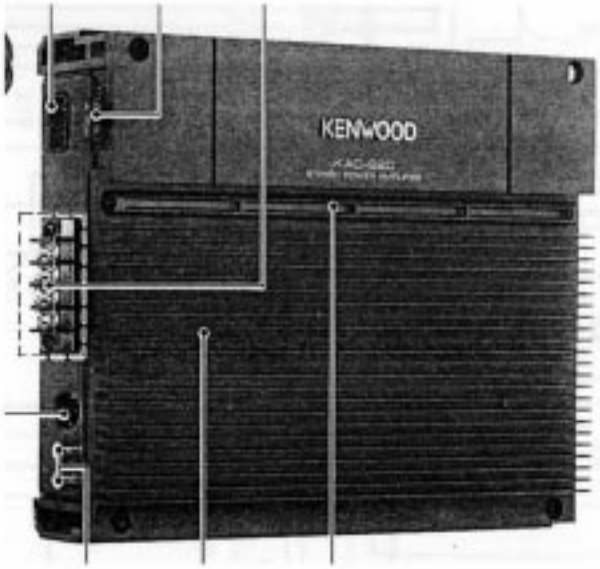

Main amp section

Maximum output power (1 kHz, 4 Ω)	160W+160W
Rated output power (10% THD, 1 kHz, 4 Ω)	140W+140W
(less than 0.5% THD, 20 Hz - 20 kHz, 4 Ω)	95W+95W
Frequency response (−3 dB)	2Hz—100kHz
Input sensitivity (at rated output) Max.	0.1V
Min.	5.0V
Signal-to-noise ratio	100dB
Input impedance	10k Ω
Damping factor (100 Hz)	More than 200
Sub woofer frequency	50Hz, 100Hz

General

Operating voltage (GND)	14.4V(11—16V)
Current consumption	30A
Dimensions (W×H×D)	250×60×300mm (9-13/16×2-3/8×11-13/16in.)
Weight	4.9kg(10.8lb)